

# HECTOR LIGHT

Dated: 01/07/2023

## Hector Light

'Hector Light' takes on a traditional lampshade form, but with a modern flare.


Material - Powder-coated Aluminium  
Fixing - Threaded Lamp Holder

## Assembly -

1 x E27 Lamp Holders  
1 x Circular Ceiling Roses 100mm  
1 x 7.6W G95 Round Opal LED Bulbs

Install using **0.75mm 2-Core PVC Cable Flex**. Cable is to be supplied and cut to length by the electrician for desired hanging height.

The wiring must be done by authorised electricians in accordance with the AS/NZS 3000 local regulations.

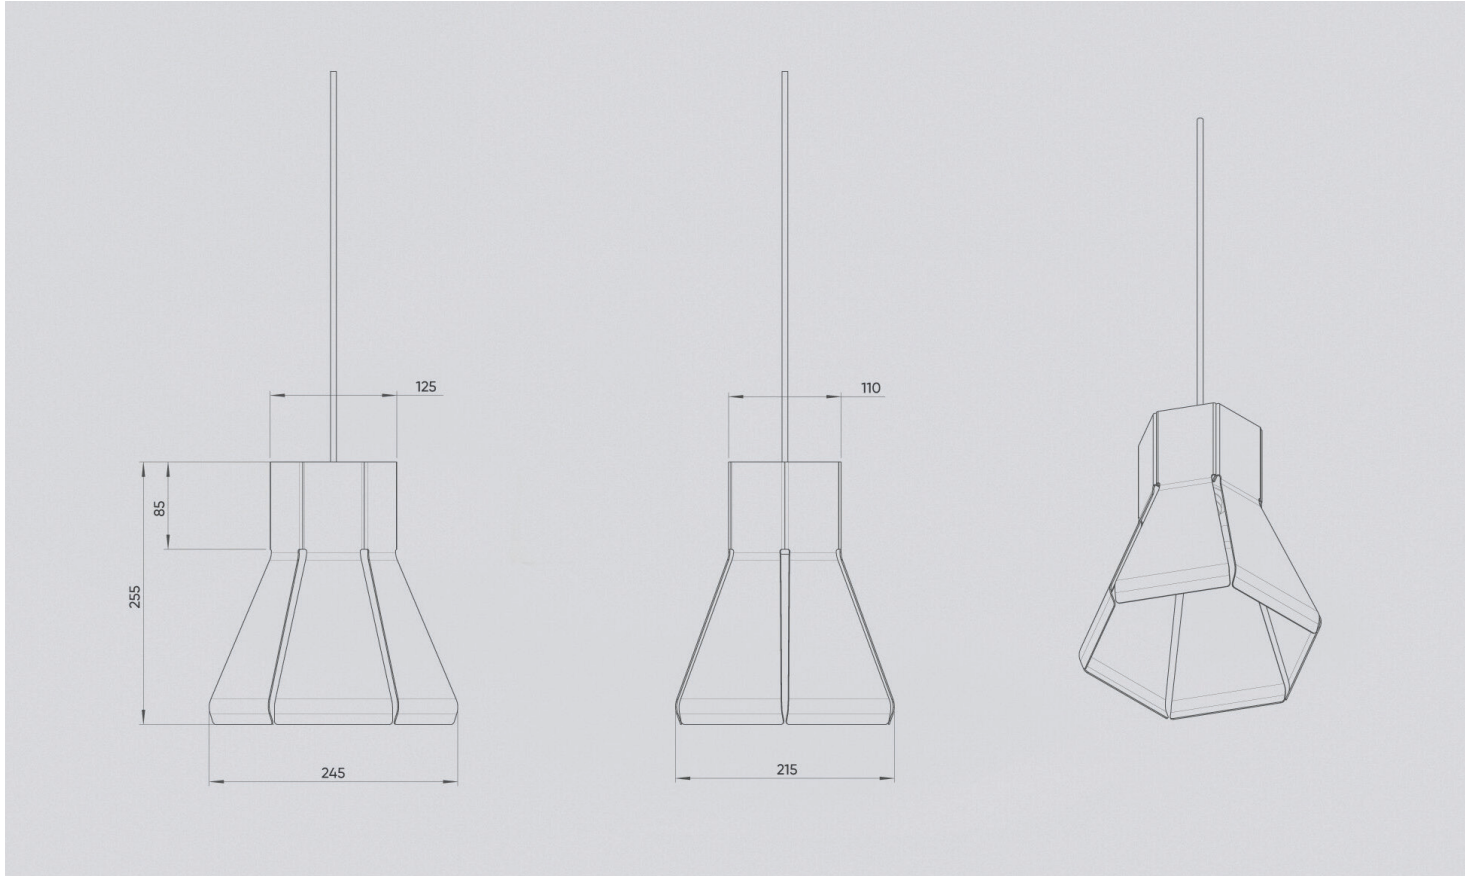

## Thermoplastic E27 Lamp Holder Kit

Cover: threaded  
Rated voltage: 250 Vac  
Terminals: screw terminals for rigid or flexible cables from 0.5 ÷ 2.5 mm<sup>2</sup>  
Fixing: with threaded hole M10x1  
Dimensions  
Diameter: 40 mm  
Height: 54 mm  
Diameter of ring nut: 56 mm

Cable Clamp:  
Material: plastic  
Hole size 10mm

## Prolux R1003 Ceiling Rose

Material: Steel, Plastic Cable Clamp.  
Finish: Matt Black, or White  
Base: 100 x 25 mm, Including Cable Clamp: 100 x 40 mm  
Weight: 160 g

## LED Dimmable G95 Opal Bulb

Brightness: 806 Lumens  
Energy Used: 7.6 Watts  
Efficacy: 106 LM/W  
Light Appearance: Warm White or Cool White  
Colour Temperature: 2700K or 4000K  
CRI: 80  
Life: 15,000 Hours  
Purpose: Indoor  
Dimmable: Yes  
Voltage: 220-240V  
Frequency: 50HZ  
Material: Opal Glass

## Lil Hector Light

- 1). Rated voltage: 230-240V, 50/60 Hz
- 2). Install light bulbs in accordance with the fixture's specifications. E27 7.6W Max G95 Round opal LED bulb only.
- 3). Install using 0.75mm 2-Core PVC cable flex. Cable is to be supplied and cut to length by the electrician for desired hanging height.
- 4). Suitable for indoor use for ambient and suitable for ambient Ta: 25- 40°C.
- 5). Wiring has to be done by authorised electrical as per AS/NZS 3000 local regulation.
- 6). Lil Hector is to be installed outside arms reach.
- 7). Dimensions:

'HECTOR245MM' - 245mmx215mmx255mm