## The Little Light


The Little Light features a minimalistic design with a small yet bold appearance.

Material - Powder-coated Aluminium Fixing - Threaded Lamp Holder

## Assembly -

1 x E27 Lamp Holders 1 x Circular Ceiling Roses 100mm 1 x 7.6W G95 Round Opal LED Bulbs Install using **0.75mm 2-Core PVC Cable** Flex. Cable is to be supplied and cut to length by the electrician for desired hanging height.

The wiring must be done by authorised electricians in accordance with the AS/NZS 3000 local regulations.

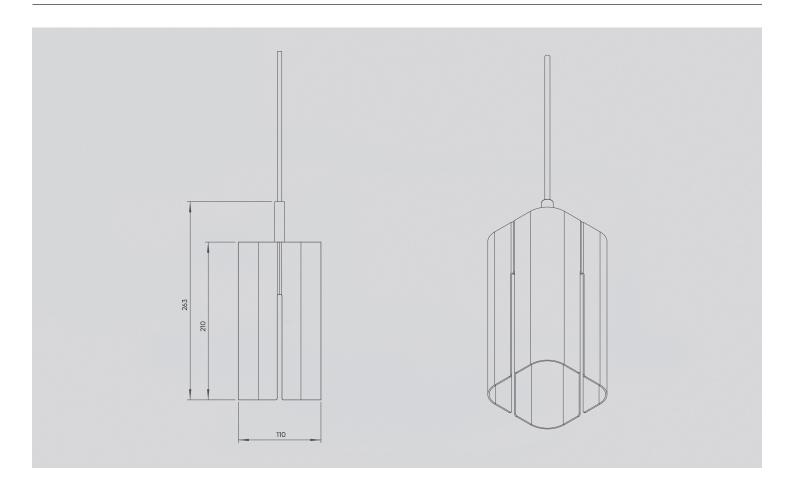

## Thermoplastic E27 Lamp Holder Kit

Cover: threaded Rated voltage: 250 Vac Terminals: screw terminals for rigid or flexible cables from 0.5 ÷ 2.5 mm2 Fixing: with threaded hole M10x1 Dimensions Diameter: 40 mm Height: \$4 mm Diameter of ring nut: 56 mm

# Prolux R1003 Ceiling Rose

Material: Steel, Plastic Cable Clamp. Finish: Matt Black, or White Base: 100 x 25 mm, Including Cable Clamp: 100 x 40 mm Weight: 160 g

## LED Dimmable G95 Opal Bull

Brightness: 806 Lumens
Energy Used: 7.6 Watts
Efficacy: 106 LM/W
Light Appearance: Warm White or Cool White
Colour Temperature: 2700K or 4000K
CRI: 80
Life: 15,000 Hours
Purpose: Indoor
Dimmable: Yes
Voltage: 220-240V
Frequency: SOHZ
Material: Opal Glass

## Cylindrical Metal Cable Clamp

Cap size: diameter 13 mm - Length 70 mm Cap material: metal.

Threaded pipe size: diameter M10x1 - Length 15 mm Threaded tube material: metal.

# The Little Light

1). Rated voltage:230-240V, 50/60 Hz

2). Install light bulbs in accordance with the fixture's specifications. E27 7.6W Max G95 Round opal LED bulb only.

3). Install using 0.75mm 2-Core PVC cable flex. Cable is to be supplied and cut to length by the electrician for desired hanging height.

4). Suitable for indoor use for ambient and suitable for ambient Ta:25- 40oC.

5). Wiring has to be done by authorised electrical as per AS/NZS 3000 local regulation.

6). The Little Light is to be installed outside arms reach.

). Dimensions:

'LITTLE110MM' - 110mmx110mmx210mm